


URANUS TC20 - URANUS TC22



 Nuova generazione di smontagomme ad alte prestazioni.

 High level tyre changers range

 Hochleistungs-Reifenmontiermaschinen (neuster Generation)






 La nouvelle génération de démonte-pneus à haute performance






 Nueva generación de desmontadora de alto nivel



URANUS TC20 - URANUS TC22



 Dati tecnici	 Technical data	 Technische Daten	 Données techniques	 Datos técnicos	URANUS TC20	URANUS TC22
Collegamento rete elettrica	Power supply	Anschluss an die elektrische Versorgung	Branchement au réseau électrique	Enchufe de red electrica	400V-3ph50Hz 230V-3ph50Hz 230V-1ph50Hz	400V-3ph50Hz 230V-3ph50Hz 230V-1ph50Hz
Velocita'	Speed	Geschwindigkeit	Vitesse	Velocidad	1	2
Serraggio esterno cerchioni	External clamp capacity	Äusserer Felgenanzug	Serrage externe des jantes	Capacidad de bloqueo externo	10"-20"	10"-22"
Serraggio interno cerchioni	Internal clamp capacity	Innerer Felgenanzug	Serrage interne des jantes	Capacidad de bloqueo interno	12"-23"	12"-24"
Larghezza cerchioni	Max rim width	Felgenbreite	Largeur des jantes	Max anchura llanta	3"-11"	3"-11"
Max diametro ruota	Max wheel diameter	Max Raddurchmesser	Diamètre maxi de la roue	Diámetro máximo neumático	1100 mm	1100 mm
Campo di lavoro stallonatore	Bead breaker range	Arbeitsbereich der Abdrückschaufel	Champ de travail du détalonneur	Range Destalonador	65-305 mm	65-305 mm
Pressione aria	Air pressure	Luftdruck	Pression de l'air	Presión aire	8-10 bar	8-10 bar
Velocita' di rotazione	Rotation speed	Drehgeschwindigkeit	Vitesse de rotation	Velocidad de rotación	7,5 rpm	7,5-15 rpm
Dimensioni max	Max dimensions	Max Abmessungen	Dimensions maxi	Max dimensión	1960x1660x1270 mm	1960x1660x1270 mm
Palo chiuso	Closed tilting pole	Geschlossener Arm	Bras fermé	Columna cerrada	1860x1660x1800 mm	1860x1660x1800 mm
Peso netto	Net weight	Nettogewicht	Poids net	Peso	223 kg	230 kg

 Dotazione Standard	 Scope Of Delivery	 Standardausstattung	 Dotation Standard	 Volumen de Suministro
Leva alzatalone	Bead lever	Hebel zur Wulstanhebung	Levier leve-talon	Palanca para rueda
Pennello per lubrificante	Lubricant brush	Schmierpinsel	Pinceau de lubrification	Cepillo para lubricante
Set protezioni utensile	Plastic tool protection	Werkzeug-Schutzsatz	Jeu de protections outil	Protección plástico util
Protezione paletta	Plastic bead shovel	Schaufelschutz	Protection palette	Protección plástico para destalonador
Set protezioni griffa	Plastic jaws protection	Klauenschutzsatz	Jeu de protections bride	Protección plástico para garras
Pistoletta di gonfiaggio CE	CE Inflating gun	CE-Druckluftpistole	Pistolet de gonflage CE	Pistola de inflado CE

Accessori principali • Main accessories • Hauptzubehör • Accessoires principaux • Accesorios principales




Solleva ruota lift90
Side lift lift90
Radaufheber lift90
Soulève-roue lit90
Elevador de rueda lift90



Pedaliera completamente estraibile per ispezione
Completely extractable pedal unit for inspection
Pedal-aggregat (zu inspektionszwecke komplett und einfach ausbaubar)
Pédalier a sortir complètement pour l'inspection
Pedales completamente extractables para inspección

Piatto zincato
Galvanized plate
Verzinkte platte
Plateau zingué
Plato galvanizado

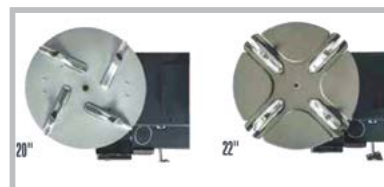

Piatto verniciato
Painted plate
Lackierte platte
Plateau verni
Plato pintado

Braccio premitallone ASSISTANT S
Bead pressure device ASSISTANT S
Sreifenschulter-niederhalteam ASSISTANT S
Bras presse-talon ASSISTANT S
Brazo empuja talón ASSISTANT S

